


Adding Miles to Mileage



Automotive Oils



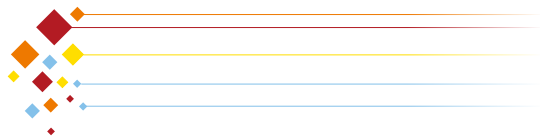

CONTENTS

AGRI OILS

Divyol Krishi Jeevan (PSO) 20W40 CF4 8

Divyol Tiller X
Power Tiller Oil 9

Divyol Unitraxx
Univeral Tractor Transmission Oil 10

CAR OILS

Divyol Spectro AX 5W40 SN
Semi Synthetic Blend Gasoline Engine Oil 12

Divyol Spectro CX 5W30 SN
Semi Synthetic Blend Gasoline Engine Oil 13

Divyol Spectro LX 10W30 SN
Advanced Passenger Car Motor Oil 14

Divyol Spectro SX 20W50 SN
High Performance Gasoline Engine Oil 15

Divyol Spectro VX 10W40 SN
Premium Multigrade Engine Oil 16

COOLANT

Divyol Artic (1:1)
Premium Quality Coolant 18

Divyol Coolmax (1:3) and Coolmax Pure (Contentrated)
Organic acid Technology (OAT) 19


DIESEL ENGINE OILS


Divyol Disol C30 / 40 / 50 API CD+
Multigrade Diesel Engine Oils 21

Divyol Autoplus – API CD / SF
Multigrade Diesel Engine Oil 22

Divyol Disol C20W40 API CD+
High Performance Premium Quality Diesel Engine Oil 23


Divyol Disol C20W50 API CD+
Multipurpose Diesel Engine Oil 24

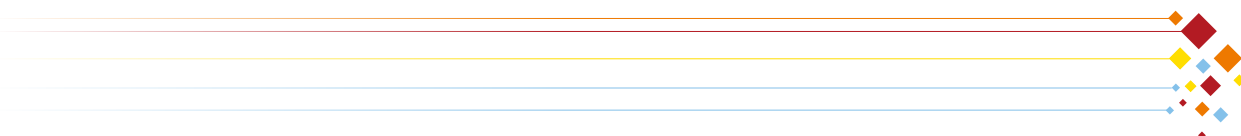


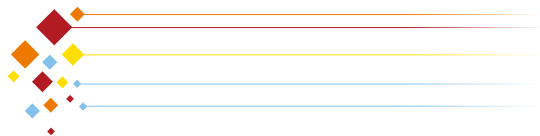

CONTENTS

Divyol Disol CG4 15W40 Advanced Heavy Duty Diesel Engine Oil	25
Divyol Disol D 20W40 – API CF / SF, T8A High Performance Premium Quality Engine Oil	26
Divyol Disol D30 API CF – API CF, MACK T8A Heavy Duty Diesel Engine Oil	27
Divyol Disol D40 / D50 API CF – API CF, MACK T8A Multigrade Diesel Engine Oils	28
Divyol Disol EXV 15W40 API CJ4 / SM High Performance Synthetic Blend	29
Divyol Disol HXV 15W40 API CJ4 / SM High Performance Synthetic Blend	30
Divyol Disol LXV 15W40 – API CK4: API CK4 / SN Premium Diesel Engine Oil, Synthetic Blend	31
Divyol Disol SXV 15W40 API CI4+ / SL High Performance Synthetic Blend	32
Divyol Disol TC 15W40 API CH4 / SL High Performance Synthetic Blend	33
Divyol Disol XV 15W40 API CI4 – API CI4 / SL High Performance Synthetic Blend	34
Divyol Disol Turbo 15W40 API CF4 / SJ High Performance Synthetic Blend	35
Divyol Red Plus 20W40 API CF / SF Multigrade Diesel Engine Oil	36
Divyol Tracxx 20W40 API CF4 Multigrade Diesel Engine Oil	37

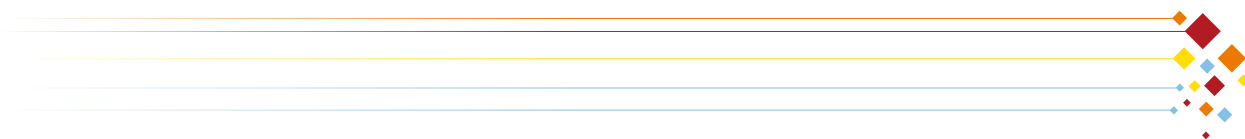

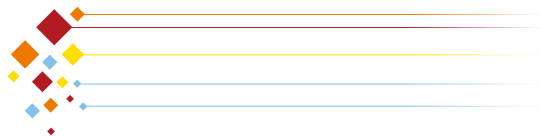

CONTENTS

DIESEL EXHAUST FLUID

Divyol Ecoblue – DEF / AUS32 Premium Diesel Exhaust Fluid	39
--	----

GAS ENGINE OILS

Divyol ECO4 SAE 20W40 API CF / SF High Performance Gas Engine Oil	41
--	----

Divyol ECO4 20W50 API SG / SF Premium Quality Gas Engine Oil	42
---	----

Divyol Gasol 30 and 40 API SG / CF Premium Quality Gas Engine Oils	43
---	----

GEAR OILS

Divyol Spine EP 90 API GL4 High Performance Gear Oil	45
---	----

Divyol Spine EP 140 API GL4 High Performance Gear Oil	46
--	----

Divyol Spine EP 80W90 API GL4 Multipurpose Gear Oil	47
--	----


Divyol Spine SXD XD 90, 75W90, 80W90 API GL5 Heavy Duty Premium Gear Oils	48
--	----


Divyol Spine SXP 75W90 API GL4 – API GL4, SYNTH BLEND Multi-purpose Extreme Pressure Gear Oils	49
---	----

Divyol Spine XD 85W140 API GL5 Multipurpose Gear Oils	50
--	----

HEAVY DUTY GAS ENGINE OILS

DIVYOL ENVO-X 1500 & 1400 API CF	52
----------------------------------	----

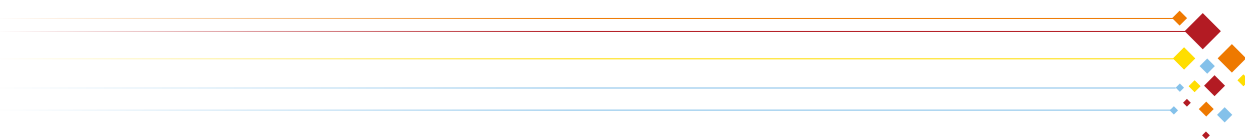


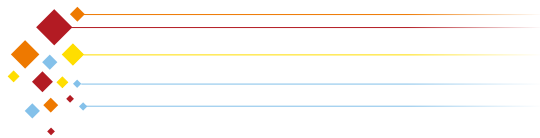


CONTENTS

MOTOR CYCLE OILS

Divyol Spin 4T Advance 10W 30 API SL JASO MA2 Premium High Performance Four Stroke Engine Oil	54
Divyol Spin 4T Scool 10W 30 API SL, JASO MA2 Premium High Performance Four Stroke Engine Oil	55
Divyol Spin 4T 20W40 API SL, JASO MA2 Premium High Performance Four Stroke Engine Oil	56
Divyol Spin 4T Zoom 20W 40 API SM, JASO MA2 Premium High Performance Four Stroke Engine Oil	57
Divyol Spin Q3 10W30 API SM / JASO MA2 High Performance Motorcycle Oil	58
Divyol Spin Q4 20W40 API SJ / JASO MA2 Multigrade Engine Oil	59
Divyol Spin Q5 20W50 High Performance Multi-grade Motorcycle Oil	60
Divyol Spin4 MAX 20W50 API SG / JASO MA2 High Performance Multi-grade Motorcycle Oil	61
Divyol Spin X2 20W50 API SJ / JASO MA2 High Performance Multi-grade Motorcycle Oil	62
Divyol Spin X3 10W30 API SN / JASO MA2 Premium Semi Synthetic Engine Oil	63
Divyol Spin X4 20W40 API SN / JASO MA 2 Premium Semi Synthetic Engine Oil	64
Divyol Spin X5 15W50 API SN / JASO MA2 Premium Semi Synthetic Engine Oil	65
Divyol Swing Shocker Oil All Weather Shocker Absorber Oil	66
Divyol Spin4 20W40 API SG / JASO MA2 Multigrade Engine Oil	67
Divyol Spin Excel 20W50 API SL / JASO MA2 High Performance Multigrade Motorcycle Oil	68

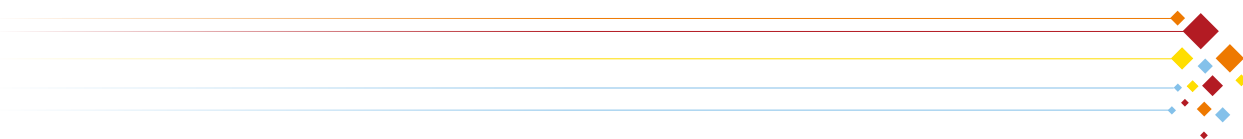

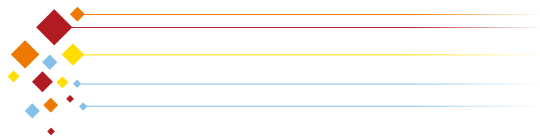

CONTENTS

OUT BOARD MOTOR OILS

Divyol Gondola X2 and X3 API TC / JASO FC
Outboard Motor Oils 70

Divyol Gondola X2
Outboard Motor Oils 71

Divyol Gondola X3
Outboard Motor Oils 72

TRANSMISSION FLUIDS

Divyol HY Trans G SAE 10W and 30
Power Shift Transmission Fluids 74

Divyol Power Trans C3 / C4 SAE 10 and 30
Hydraulic Transmission Fluids 75


Divyol Hydraulic Oil 30W
Construction Equipment Oil 76

Divyol TQX II – Type: DEXRON II G
Automatic Transmission Fluid 77

Divyol TQX Type: DEXRON III E
Automatic Transmission Fluid 78

Divyol TQX-1
Automatic Transmission Fluid 79

Divyol Entro HVI 10W
Construction Equipment Oil 80

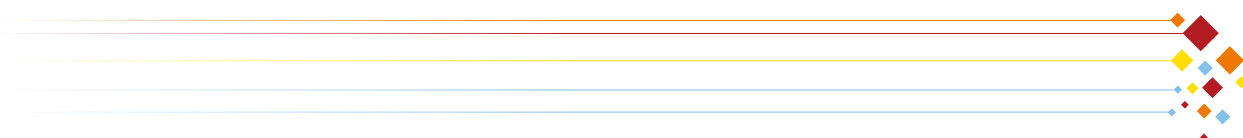

AGRI OILS



DIVYOL KRISHI JEEVAN (PSO) 20W40 CF4

Applications

For smooth operation and longer life of agricultural machinery, farmers depend on Divyol Krishi Jeevan Pump Set Oil 20W40 RO. This oil is specially formulated for pump set diesel engines and farm equipment like tractors, power tillers, harvesters, etc. It is used in slow, medium and high speed stationary diesel engines fitted on agricultural pump sets operating on HSD or LDO. It is designed for use in both types of engines – compression ignition and spark ignition, ensuring optimum performance in the toughest working conditions. It is also used in industrial pump sets and other small stationary diesel engines.

Specifications

Divyol Krishi Jeevan Pump Set Oil is blended from highly refined base stocks and a combination of antioxidant, anti-wear and anti-foam additives. It meets and exceeds standards of API CF / SF and OEM specifications.

Pack Sizes

1.2L, 3.5 L, 26 L, 50 L, 210 L.

Advantages

Divyol Krishi Jeevan Pump Set Oil enables users to get optimum performance from their farm machinery / equipment by providing the highest level of protection from corrosion and wear. It provides superior anti-corrosion protection to the engine's internal parts even during idle periods. It facilitates easy starting even in low ambient temperatures, helps maintain a clean engine and enhances fuel efficiency.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	100
6	Flash point, min. COC	ASTM D 92	°C	200
7	Pour point, max.	ASTM D 97	°C	-3

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL TILLER X

Power Tiller Oil

Applications

Divyol Tiller X Oil is a specially blended SAE 20W40 engine oil for power tillers and other small stationary engines. It enables tillers to perform efficiently by providing superior protection to engine interiors even in extreme conditions of abrasive wear, corrosion and deposits.

Specifications

Divyol Tiller X Oil is blended from highly refined base stocks and a combination of anti-oxidant, anti-wear and anti-foam additives. In performance, it meets and exceeds standards of API CF / SF.

Pack Sizes

1.5 L, 3.5 L, 26 L, 50 L, 210 L.

Advantages

Divyol Tiller X-RO is a special blend of oil designed to provide maximum protection of tiller parts from corrosion and wear. It ensures high detergency and excellent oxidation stability, enhanced fuel efficiency, engine cleanliness and longer battery life. It also enables easy starting in low ambient temperatures.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	100
6	Flash point, min. COC	ASTM D 92	°C	200
7	Pour point, max.	ASTM D 97	°C	-6

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL UNITRAXX

Univeral Tractor Transmission Oil

Applications

Divyol Unitraxx Oil is a specially formulated multi-purpose lubricant for new generation agricultural tractors. This single lubricant helps increase the efficiency of tractor transmission, differential and final drive, wet multiple disc brake and hydraulic system. It also functions as a power brake, power steering, power take off and implement drive fluid.

Specifications

Divyol Unitraxx Oil meets and exceeds performance standards of:

- John Deere JDM J20 D / J20C
- Ford ESN M2C 134D
- Case New Holland CNH MAT 3505 / 3525 / 3526
- AGCO: Massey Ferguson M1145 / M1143 / M1135 / M1138
- API GL4

Pack Sizes

1 L, 5 L, 10 L, 20 L, 26 L, 50 L, 210 L.

Advantages

Divyol Unitraxx Oil ensures sufficient friction and heat transfer characteristics to improve efficiency of tractor wet brakes and power take-off units. As a superior lubricant it provides a protective film around moving metal surfaces, ensuring noise-free operation; thus resisting breakdown even under severe conditions. Consequently it also helps increase equipment life.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 40 °C	ASTM D 445	cSt	To report
5	Kinematic viscosity at 100 °C	ASTM D 445	cSt	10 – 11.5
6	Viscosity index, min.	ASTM D 2270	-	110
7	Flash point, min. COC	ASTM D 92	°C	210
8	Pour point, max.	ASTM D 97	°C	-30

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



CAR OILS



DIVYOL SPECTRO AX 5W40 SN

Semi Synthetic Blend Gasoline Engine Oil

Applications

Divyol Spectro AX 5W40 SN is a semi synthetic blend engine oil ideal for both – new generation gasoline and diesel engine passenger cars and also recommended for light commercial vehicles. It is blended from premium quality base stocks and select additives.

Specifications

Divyol Spectro AX 5W40 SN meets and exceeds performance standards as per API SN / CF.

Pack Sizes

1 L, 3.5 L, 4 L, 26L, 50 L, 210 L.

Advantages

Divyol Spectro AX 5W40 SN enables vehicles to perform even under the most severe conditions and temperatures. Besides good cold starting it also ensures effective protection against corrosion and oxidation at high temperatures. The product also offers high resistance to sludge and low volatility characteristics

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	9.3 – 12.5
5	Viscosity index, min.	ASTM D 2270	-	150
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-27

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPECTRO CX 5W30 SN

Semi Synthetic Blend Gasoline Engine Oil

Applications

Divyol Spectro CX 5W30 is a semi synthetic blend engine oil is ideal for both – new generation gasoline and diesel engine passenger cars and also recommended for light commercial vehicles. It is blended from premium quality base stocks and select additives.

Specifications

Divyol Spectro CX 5W30 Semi-synthetic Blend Gasoline oil meets and exceeds performance standards as per API SN / CF.

Pack Sizes

1L, 3L, 3.5 L, 5L, 26L, 50 L, 210 L.

Advantages

Divyol Spectro CX 5W30 enables vehicles to perform even under the most severe conditions and temperatures. Besides facilitating good cold starting it also provides effective protection against corrosion and oxidation at high temperatures. The product also offers high resistance to sludge and low volatility characteristics.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	9.3 – 12.5
5	Viscosity index, min.	ASTM D 2270	-	150
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-27

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPECTRO LX 10W30 SN

Advanced Passenger Car Motor Oil

Applications

Divyol Spectro LX 10W30 SN is an advanced blend of motor oil for most models of modern high output turbo charged gasoline engines, such as passenger cars, sport utility vehicles, vans, and light duty trucks. It is also a good choice for vehicles running on upto 85% ethanol-blended fuels.

Specifications

Divyol Spectro LX 10W30 SN is blended using premium quality base stock and select additives. It meets and exceeds performance standards as per API SN.

Pack Sizes

1L, 3L, 3.5 L, 26L, 50 L, 210 L.

Advantages

Divyol Spectro LX 10W30 SN provides excellent protection against sludge and wear for a long period, as well as lubrication over a wide range of temperatures. It helps maintain cleanliness of critical components like piston, turbo-charger and seal. Fuel economy gets maximized; so does oil consumption, leading to less frequent oil changing.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	9.3 –12.5
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPECTRO SX 20W50 SN

High Performance Gasoline Engine Oil

Applications

Divyol Spectro SX 20W50 SN is a high performance oil specially formulated for four stroke gasoline engines of passenger cars and light vans with or without a turbocharger. It is especially recommended for gasoline engines fitted with emissions control equipment as well as industrial and marine applications of passenger car type gasoline engines.

Specifications

Divyol Spectro SX 20W50 SN is blended using premium quality base stock and select additives. It meets and exceeds performance standards as per API SN.

Pack Sizes

0.5L, 1L, 3L, 3.5 L, 26L, 50 L, 210 L.

Advantages

Divyol Spectro SX 20W50 SN provides effective protection against sludge and wear for a long period, as well as lubrication over a wide range of temperatures. It possesses excellent detergent and dispersant additives that help control piston and ring deposits and prevents filter blocking. Oil consumption is also reduced significantly, resulting in longer change over intervals.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	16.3 – 21.9
5	Viscosity index, min.	ASTM D 2270	-	140
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



DIVYOL SPECTRO VX 10W40 SN

Premium Multigrade Engine Oil

Applications

Divyol Spectro VX 10W40 SN is a multigrade engine oil specially designed for passenger cars, light trucks, powerboats, motorcycles and other four-stroke gasoline powered equipment. The product was developed with the aim of improving fuel economy of the vehicles. It is also suitable for engines operating on gasoline, ethanol blended fuels upto E85, propane or compressed natural gas (CNG).

Specifications

Divyol Spectro VX 10W40 SN is formulated from premium base fluids and technologically advanced additives. Besides conforming to performance specifications as per API SN, it also meets and exceeds the standard requirements of North American, Asian, and European vehicles.

Pack Sizes

1L, 3.5L, 26L, 50L, 210L

Advantages

Divyol Spectro VX 10W40 SN provides excellent protection against sludge and wear for a long period, as well as lubrication over a wide range of temperatures. It helps maintain cleanliness of critical components like piston, turbo-charger and seal. Fuel economy gets maximized; so does oil consumption, resulting in longer change over intervals.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

COOLANTS



DIVYOL ARTIC (1:1)

Premium Quality Coolant

Description

Divyol Arctic is an environment friendly, long life engine coolant formulated using high purity mono ethylene glycol and a balanced mixture of organic acid based corrosion inhibitors and OAT additive technology. It provides excellent corrosion protection for all metals in cooling systems of petrol, diesel and CNG fitted engines. It is available pre-diluted with de-ionised water at 50% which protects modern engine components from winter freezing and summer boil over. This environment friendly radiator coolant is free from potentially harmful amine, borates, nitrites, phosphates or silicates. It also contains very high quality additives and will not harm hoses, plastics or original vehicle finishes.

Applications

Divyol Arctic is suitable for use in vehicular and non-vehicular automotive engines that have a closed loop coolant circulation system such as modern passenger cars, light and heavy duty commercial vehicles, construction machines, agricultural tractors as a radiator coolant for the engines manufactured from cast iron, aluminium alloys, etc.

Features and Benefits

- The advanced anti-corrosion system provides excellent protection against crevice corrosion in aluminium and cavitation corrosion-erosion in cast iron, protecting the radiator components, ensuring long life.
- Compatibility with rubber and sealing materials
- The non-silicate formulation protects against the formation of gels and deposits even in the presence of hard water, ensuring improved coolant stability and longer effective coolant life.
- Effective protection against frost in freezing winter conditions depending upon the concentration
- Excellent heat transfer properties enable high temperature engine parts to be effectively cooled and protected from damage

Performance Level / Specifications

Divyol Arctic meets and exceeds the standards:

- JIS K 2234-2006
- BS 6580 : 2010
- ASTM D 3306 and 4985
- GB 29743 : 2013

Pack Sizes

0.5L, 1L, 5L, 50L, 210L

Sr. No.	Characteristics	Test Method	Typical values
			Divyol Arctic
1	Appearance	Visual	Bright & clear
2	Colour	Visual	Golden yellow
3	Density at 20 °C	ASTM D 1122	1.06
4	Boiling point, °C	ASTM D 1120	109
5	pH value	ASTM D 1287	8.1
6	MEG concentration, % wt		50
7	Freezing point, °C	ASTM D 3321	-36

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



DIVYOL COOLMAX (1:3) AND COOLMAX PURE (CONCENTRATED)

Organic Acid Technology (OAT)

Description

Divyol Coolmax is an environment friendly, long life engine coolant formulated using high purity mono ethylene glycol with a balanced mixture of organic acid based corrosion inhibitors and OAT additive technology. It provides excellent corrosion protection for all metals in cooling systems of petrol, diesel and CNG fitted engines. It is available pre-diluted with de-ionised water as Divyol Coolmax and in concentrated form as Divyol Coolmax–Pure. These environment friendly products are free from potentially harmful amine, borates, nitrites, phosphates or silicates. They also contain very high quality additives and will not harm hoses, plastics or original vehicle finishes.

Applications

Divyol Coolmax is suitable for use in vehicular and non-vehicular automotive engines having a closed loop coolant circulation system such as passenger cars, light and heavy duty commercial vehicles, construction machines, agricultural tractors as a radiator coolant for the engines manufactured from cast iron, aluminium alloys, etc.

Features and Benefits

- The advanced anti corrosion system provides excellent protection against crevice corrosion in aluminium and cavitation corrosion-erosion in cast iron, protecting the radiator components and ensuring long life.
- Compatibility with rubber and sealing materials
- The non-silicate formulation protects against the formation of gels and deposits even in the presence of hard water, ensuring improved coolant stability and longer effective coolant life.
- Effective protection against frost in freezing winter conditions depending upon the concentration
- Excellent heat transfer properties enable high temperature engine parts to be effectively cooled and protected from damage

Performance Level / Specifications

Divyol Coolmax meets and exceeds the standards:

- JIS K 2234-2006
- BS 6580 : 2010
- ASTM D 3306 and 4985
- GB 29743 : 2013

Pack Sizes

0.5L, 1L, 5L, 50L, 210L

Sr. No.	Characteristics	Test Method	Typical values	
			Divyol Coolmax-Pure	Divyol Coolmax
1	Appearance	Visual	Bright & clear	Bright & clear
2	Colour	Visual	Green	Green
3	Density at 20 °C	ASTM D 1122	1.12	1.03
4	Boiling point, °C	ASTM D 1120	170	104
5	pH value	ASTM D 1287	8.5	8.1
6	MEG concentration, % wt		97.0	30.0
7	Freezing point, °C	ASTM D 3321	ND	-15

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIESEL ENGINE OILS



DIVYOL DISOL C30 / 40 / 50 API CD+ Multigrade Diesel Engine Oils

Applications

Divyol Disol multigrade diesel engine oils are blends for a range of equipment with naturally aspirated, turbo charged and supercharged diesel engines with round the clock operations under heavy loads. It is also a much preferred engine oil for off-highway applications, stationary DG sets, construction equipment, earthmoving equipment, etc.

Specifications

Divyol Disol multigrade diesel engine oils are formulated with high quality detergents to minimize engine deposits. Each grade in the range is developed to meet and exceed OEM recommendations as well as API CD/ SF performance levels.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 50 L, 210 L.

Advantages

Divyol Disol multigrade diesel engine oils are your all-weather friends. Each grade offers excellent protection against corrosion besides good thermal and oxidation stability. It also has superior detergent and dispersant qualities that control deposits and sludge build-up. All these add up to enhanced equipment life and reduced maintenance costs.

Sr. No.	Characteristics	Test Method	UOM	Disol C30 API CD+	Disol C40 API CD+	Disol C50 API CD+
1	Appearance	Visual	-	Bright and clear	Bright and clear	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red	Red	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report	To report	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	9.3 – 12.5	12.5 – 16.3	16.3 – 21.9
5	Viscosity index, min.	ASTM D 2270	-	95	95	95
6	Flash point, min. COC	ASTM D 92	°C	215	215	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	4.5	4.5	4.5
8	Pour point, max.	ASTM D 97	°C	-6	-6	-6

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL AUTOPLUS – API CD / SF

Multigrade Diesel Engine Oil

Applications

Divyol Autoplus is specially developed for modern diesel engines in commercial vehicles and equipment with API CD performance requirements. It is a popular choice for diesel engines of commercial vehicles, light trucks, passenger cars, even in hilly regions. It is ideal for naturally aspirated and turbo charged engines, on-highway light and medium duty commercial vehicles and off-highway applications like construction, quarrying, and agriculture.

Specifications

Divyol Autoplus is formulated with an optimized combination of high viscosity base oils and a balanced additive system. It conforms to API CD / SF performance standards.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 50 L, 210 L.

Advantages

Divyol Autoplus provides excellent protection against corrosion besides controlling deposits and sludge buildup. It also ensures good thermal and oxidation stability. Its premium quality additives possess high detergency and dispersancy. These benefits add up to significant improvement in efficiency, productivity, enhanced equipment life and reduced maintenance costs.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	95
6	Flash point COC, min.	ASTM D 92	°C	200
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	2
8	Pour point, max.	ASTM D 97	°C	-3

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL C20W40 API CD+

High Performance Premium Quality Diesel Engine Oil

Applications

Divyol Disol C20W40 engine oil is specially blended for equipment that require API CD standard performance. It is ideal for commercial vehicles, light trucks, passenger cars and naturally aspirated and turbo charged engines. It helps you get the best performance from your on-highway light and medium duty commercial vehicles, even in hilly regions, and off-highway applications like construction, quarrying, and agriculture.

Specifications

Divyol Disol C20W40 is formulated with an optimized combination of high viscosity base oils and a balanced additive system. It meets and exceeds the recommendations of API-CD / SF.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 50 L, 210 L.

Advantages

Divyol Disol C20W40 significantly improves the productivity of your diesel powered vehicle or equipment. It provides excellent protection against corrosion, good thermal and oxidation stability, high detergency and dispersancy, and also controls deposits and sludge build-up; all of which help enhance equipment life and reduce maintenance costs.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	102
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	4.5
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL C20W50 API CD+

Multipurpose Diesel Engine Oil

Applications

Divyol Disol C20W50 is a multipurpose diesel engine oil specially blended to meet API CF-4 performance requirements. It enhances efficiency and productivity of diesel engines of commercial vehicles, light trucks, and naturally aspirated, turbo charged and super charged diesel engines. It helps you get the best out of on-highway light and medium duty commercial vehicles as well as off-highway applications like construction, quarrying, and agriculture. It is especially suitable for applications in warm climates.

Specifications

Divyol Disol C20W50 is formulated with an optimized combination of high viscosity base oils and fortified with cleaning agents to minimize deposits and thickening. It meets and exceeds API CD+ / CF performance levels.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 50 L, 210 L.

Advantages

Divyol Disol C20W50 offers excellent protection against corrosion besides good thermal and oxidation stability. It also controls deposits and oil thickening over high temperatures. All these add up to enhanced equipment life and reduced maintenance costs.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	16.3 – 12.9
5	Viscosity index, min.	ASTM D 2270	-	110
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	4.5
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL CG4 15W40

Advanced Heavy Duty Diesel Engine Oil

Applications

Divyol Disol CG4 15W40 is designed to meet Euro II and Euro III norms as well as the stringent low exhaust emission standards. It is ideal for constant high speed engines and stop-start applications operating under severe conditions, especially recommended for diesel passenger cars, on-highway heavy duty trucks and off-highway applications in construction, mining and agriculture.

Specifications

Divyol Disol CG4 15W40 is a unique formulation of superior base oils and additives that help maintain a very clean engine. The oil meets and exceeds API CG4 / SJ performance standards.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 50 L, 210 L.

Advantages

Divyol Disol CG4 15W40 significantly improves the viability of your diesel run vehicles and machines. It offers excellent protection against corrosion besides good thermal and oxidation stability with superior detergent and dispersant qualities to control high amounts of deposits and soot. These benefits add up to enhanced equipment life and reduced maintenance costs.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	8.5
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL D 20W40 – API CF / SF, T8A

High Performance Premium Quality Engine Oil

Applications

Divyol Disol D 20W40 is a general purpose oil for all types of turbo-charged, naturally aspirated gasoline and diesel engines, especially of old generation trucks, buses, tractors, LCVs, diesel gensets, etc. It ensures efficient operation in moderate to severe conditions.

Specifications

Divyol Disol D20W40 is formulated from high quality paraffinic base oils with selected premium quality additives. It meets and exceeds standards of:

- API-CF/SF
- IS:13656
- EDL-3
- EPL-3
- MIL-L-2104 C
- MACK T-8A

Pack Sizes

500 ml, 1 L, 5 L, 6 L, 7.5 L, 10 L, 20 L, 50 L, 210 L.

Advantages

Divyol Disol D20W40 offers excellent lubrication under severe service conditions. It provides outstanding protection against corrosion, excellent resistance to thermal breakdown of the oil and resistance to oil degradation and thickening. It also extends oil drain intervals

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	13.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	110
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	9
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL D30 API CF – API CF, MACK T8A

Heavy Duty Diesel Engine Oil

Applications

Divyol Disol D30 is a superior monograde oil for heavy duty diesel engines, especially in off-highway applications and old generation on-highway vehicles. It is ideal for turbo charged, inter-cooled engines, non-vehicular equipment like pumps which operate under steady state conditions and various construction equipments.

Specifications

Divyol Disol D30 is formulated using high quality base oils with premium quality additives. It meets and exceeds performance standards of API CF, MAN 270, ACEA E2, MB 228.0 and MTU category 1.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 26 L, 50 L, 210 L

Advantages

Divyol Disol D30 provides excellent lubrication under severe service conditions. It also ensures complete protection against corrosion, piston deposits and soot, thus maintaining a clean engine and enhancing its life.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	9.3 – 12.5
5	Viscosity index, min.	ASTM D 2270	-	90
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	9
8	Pour point, max.	ASTM D 97	°C	-6

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL D40 / D50 API CF – API CF, MACK T8A

Multigrade Diesel Engine Oils

Applications

Divyol Disol D40 and D50 are multigrade diesel engine oils for equipment with API CF / CD performance requirements. These special blends are ideal for use in naturally aspirated, turbo charged and supercharged diesel engines with round-the-clock operations under heavy loads, such as off-highway applications, stationary DG sets, construction equipment, earthmoving equipment, etc.

Specifications

Divyol Disol D40 and D50 diesel engine oils are formulated from superior quality base oils and premium additives like detergent and dispersant agents. These oils meet and exceed API CF / CD performance standards.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 50 L, 210 L

Advantages

Divyol Disol D40 and D50 multigrade diesel engine oils are your all-weather friends. Both D40 and D50 offer excellent protection against corrosion besides good thermal and oxidation stability. Each also has superior detergent and dispersant qualities that control deposits and sludge build-up. All these add up to enhanced equipment life and reduced maintenance costs.

Sr. No.	Characteristics	Test Method	UOM	Disol D40	Disol D50
1	Appearance	Visual	-	Bright and clear	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3	16.3 – 21.9
5	Viscosity index, min.	ASTM D 2270	-	90	90
6	Flash point, min. COC	ASTM D 92	°C	215	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	9	9
8	Pour point, max.	ASTM D 97	°C	-6	-6

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL EXV 15W40 API CJ4 / SM

High Performance Synthetic Blend

Applications

Divyol Disol EXV 15W40 high performance synthetic oil is designed for use in both diesel and petrol run vehicles. It is ideal for engines of various types, including multi-valve, fuel injection, turbo charged, twin cam and carburetor engines. It is specially recommended for modern vehicles with diesel particulate filters (DPFs) and three way catalysts (TWC).

Specifications

Divyol Disol EXV 15W40 meets and exceeds API CJ4 / SM, BS VI performance standards. It is suitable for the latest European and Japanese models with DOHC and GDI engines.

Pack Sizes

1 L, 5 L, 7.5 L, 10 L, 15 L, 26 L, 50 L, 210 L.

Advantages

Divyol Disol EXV 15W40 is an excellent lubricant for modern engines. It is a true 'all-weather oil', enabling the engine to perform efficiently despite wide variations in temperature. It keeps the engine clean and free of deposits, giving extended oil drain intervals and resulting in extended engine life. It is also a 'clean and green' oil: by reducing Nox and CO particles, it minimizes its environmental impact.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	160
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-33

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL HXV 15W40 API CJ4 / SM

High Performance Synthetic Blend

Applications

Divyol Disol HXV 15W40 is a heavy duty, versatile oil for superior protection of diesel engines, especially in high temperature and high pressure operating conditions. It is specially designed for vehicles fueled by Ultra Low Sulphur Diesel (ULSD). It also protects the installed emission equipment including DPF, catalytic converter, EGR and SGR injection; thus complying with stringent global emission standards for vehicles that need low ash engine oils.

Specifications

Divyol Disol HXV 15W40 meets and exceeds API CJ-4 / SM, ACEA E5 / E7, CAT ECF-3, Cummins CES 20081, DDC Power Guard 93K218, Mack EO-0 Premium Plus, Renault VI RLD-3 and Volvo VDS-4 performance standards.

Pack Sizes

26 L, 50 L, 210 L

Advantages

Divyol Disol HXV 15W40 ingredients include stable additives that offer excellent soot dispersancy to protect against oil thickening, abrasive wear and corrosion. It also helps prevent varnish and sludge formation. These benefits add up to extended drain intervals for improved fuel performance.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7.5
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL LXV 15W40 – API CK4: API CK4 / SN

Premium Diesel Engine Oil, Synthetic Blend

Applications

Divyol Disol LXV 15W40 is a heavy duty, versatile oil for superior protection of diesel engines. It is ideal for the new on-highway diesel trucks with Exhaust Gas Recirculation (EGR) and low emission engines with ULSD equipped with Diesel Particulate Filters (DPF). It is also suitable for off-highway and construction equipment. Specially recommended for all naturally aspirated and turbocharged four-stroke diesel engines.

Specifications

Divyol Disol LXV 15W40 meets and exceeds API CK4 as well as OEM specifications. It is ideal for use in engines from leading Japanese, European, Asian and American manufacturers and vehicles by TATA, Ashok Leyland, Mahindra, Eicher, Volvo, MAN, Mercedes, Scania, AMW.

Pack Sizes

1 L, 5 L, 7 L, 7.5 L, 10 L, 15 L, 26 L, 50 L, 210 L.

Advantages

Divyol Disol LXV 15W40 provides excellent lubrication of modern diesel engines. Benefits include outstanding wear protection, prevention of clogging of DPFs and SCRs and extended engine life. It also extends service life of after treatment systems.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7.5
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL SXV 15W40 API CI4+ / SL

High Performance Synthetic Blend

Applications

Divyol Disol SXV 15W40 is a heavy duty versatile oil for superior protection of diesel engines. It is specially designed for the latest low emission engines fitted with EGR technology. It is recommended for use in naturally aspirated and turbo charged diesel engines, mixed fleet, on-highway heavy duty trucking, off-highway construction and mining equipment. Specially recommended for vehicles and tractors manufactured by leading companies.

Specifications

Divyol Disol SXV 15W40 meets and exceeds OEM specifications as per API CI-4+ / SL, MB 228.3 / 229.1, VOLVO VDS-3, MAN M3275, MACK EO-N, ACEA E7 / B4 / A3-12, CUMMINS CES 20078 / 77 / 76, CATERPILLAR ECF-2 and GLOBAL DHD-1. It is ideal for use in engines from leading Japanese, European, Asian and American manufacturers and vehicles manufactured by TATA, Ashok Leyland, Mahindra, Eicher, Volvo, MAN, Mercedes, Scania and AMW.

Pack Sizes

1 L, 5 L, 7 L, 7.5 L, 10 L, 15 L, 26 L, 50 L, 210 L.

Advantages

Divyol Disol SXV 15W40 provides excellent lubrication of modern diesel engines. Its advanced additive system ensures control over soot induced wear and high temperature piston deposits besides excellent foaming, oxidation stability and extra high viscosity index – benefits that add up to extended engine life.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	10
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL TC 15W40 API CH4 / SL

High Performance Synthetic Blend

Applications

Divyol Disol TC 15W40 is a superior quality, multigrade shear stability crank case high performance oil for modern engines. It is recommended for the toughest on and off highway equipment and vehicles manufactured by leading companies. It is ideal for use in new generation diesel heavy commercial equipment.

Specifications

Divyol Disol TC 15W40 meets and exceeds OEM specifications as per API CH-4 / CG-4 / CF-4 / CF / CF-2 / SL, MB 228.3, VOLVO VDS 2, MAN 3275, ACEA E7-12, A3 / B4-12, BIS 13656 -2014 and EDL 7. It is suitable for vehicles manufactured by TATA, Ashok Leyland, Mahindra, Eicher, TAFE, Escorts, PTL, John Deere and HMT.

Pack Sizes

1 L, 5 L, 7.5 L, 10 L, 15 L, 26 L, 50 L, 210 L.

Advantages

Divyol Disol TC 15W40 provides outstanding protection against corrosion and high temperature piston deposits by resisting thermal breakdown, degradation and thickening of the oil. Benefits include extended oil drain intervals and longer engine life.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	10
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL XV 15W40 API CI4 – API CI4 / SL

High Performance Synthetic Blend

Applications

Divyol Disol XV 15W40 offers superior lubrication for the latest ultra-low emission diesel engines and meets stringent global specifications. It is ideal for engines fitted with exhaust gas recirculation (EGR) technology to meet EURO II and III emissions norms. It also exceeds the lubrication requirements of the latest ultra-low emission diesel engines.

Specifications

Divyol Disol XV 15W40 is fortified with additives to control the increase in viscosity. This oil meets and exceeds API CI-4 performance standards.

Pack Sizes

1 L, 5 L, 7.5 L, 10 L, 15 L, 26 L, 50 L, 210 L.

Advantages

Divyol Disol XV 15W40 provides outstanding protection against wear and corrosion. It also keeps the engine free of deposits and eliminates great amounts of soot. It ensures excellent oxidation stability. These benefits add up to longer intervals between oil changes and more significantly extended life of the cylinder liner, piston rings, valve cams.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	10
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL DISOL TURBO 15W40 API CF4 / SJ

High Performance Synthetic Blend

Applications

Divyol Disol Turbo 15W40 is specially developed for shear stable turbo / super charged diesel engines. It is recommended for turbo /super charged diesel engines fitted in heavy and light commercial vehicles, agricultural tractors, buses, trucks, excavators, tippers, dozers, DG sets, etc., especially vehicles manufactured by leading companies.

Specifications

Divyol Disol Turbo 15W40 meets and exceeds performance standards of API CF4 / SJ, MIL-L-2104 E, ALLISON C-4, VOLVO – VDS, MB 228.1, BIS : 13656-2014, EDL5, EPL 4, MAN 271 and ACEA E2-96 / A3-96. It is suitable for vehicles manufactured by TATA, Ashok Leyland, Mahindra, Eicher, TAFE, Escorts, ITL, PTL, John Deere, HMT etc.

Pack Sizes

500 mL, 1 L, 3 L, 5 L, 6 L, 7.5 L, 10 L, 15 L, 26 L, 50 L, 210 L.

Advantages

Divyol Disol Turbo 15W40 provides outstanding protection against corrosion and high temperature piston deposits by resisting thermal breakdown, degradation and thickening of the oil. Benefits include extended oil drain intervals and longer engine life.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	9
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



DIVYOL RED PLUS 20W40 API CF / SF Multigrade Diesel Engine Oil

Applications

Divyol Red Plus 20W40 is a specially blended general purpose multi-grade crank case oil for gasoline and diesel engines. It is ideal for gasoline and naturally aspirated diesel engines and also suitable for LCVs, agricultural equipment, two and three-wheelers, diesel gensets, etc.

Specifications

Divyol Red Plus 20W40 meets and exceeds API CF / SF specifications.

Pack Sizes

500 ml (PET bottle), 1 L (PET bottle), 26 L, 50 L, 210 L.

Advantages

Divyol Red Plus 20W40 provides outstanding protection against corrosion besides resisting thermal breakdown, degradation and thickening of the oil. Benefits include high detergency, oxidation stability and extended oil drain intervals.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	100
6	Flash point, min. COC	ASTM D 92	°C	195
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	4.5
8	Pour point, max.	ASTM D 97	°C	-3

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL TRACXX 20W40 API CF4

Multigrade Diesel Engine Oil

Applications

Divyol Tracxx 20W40 is a shear-stable multigrade diesel engine oil, specially formulated for fleet working in severe conditions. It is ideal for use in all types of tractors and fleets. It is suitable for both, light and heavy-duty engines where multigrade oil is preferred.

Specifications

Divyol Tracxx 20W40 meets and exceeds performance specifications as per API CF-4, BIS:13656-2014, EDL-4 and MACK T8A. It is suitable for vehicles manufactured by Mahindra, TAFE, HMT, New Holland, John Deere, Sonalika International, Escorts Agri Machinery, etc.

Pack Sizes

1 L, 5 L, 6 L, 7.5 L, 8.5 L, 10 L, 20 L, 26 L, 50 L, 210 L.

Advantages

Divyol Tracxx 20W40 provides outstanding protection against corrosion besides resisting thermal breakdown, degradation and thickening of the oil. Benefits include excellent lubrication under severe conditions and extended oil drain intervals.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	9
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



DIESEL EXHAUST FLUID

DIVYOL ECOBLUE – DEF / AUS32

Premium Diesel Exhaust Fluid

Applications

Divyol Ecoblue is specially developed for SCR enabled BS IV engines. It is ideal for modern commercial vehicles like diesel trucks, long haul fleets and buses; and suitable also for other BS IV / VI or (Euro IV / V / VI) compliant diesel engines employing SCR / EGR-SCR technology.

Specifications

Divyol Ecoblue is a high quality, highly pure non-toxic aqueous urea solution for NOx reduction. It meets and exceeds SO 22241-1: 2006, S 17042 (PART 1): 2018 performance standards.

Pack Sizes

20 L, 210 L.

Advantages

Divyol Ecoblue provides excellent protection for the SCR catalyst. It prevents gummy deposits in the tail pipe and fouling and clogging of the spray nozzles. It also reduces the harmful NOx emissions and improves fuel efficiency.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Nil
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Specific gravity at 20 °C	ASTM D 1298	-	1.087 – 1.093
5	Urea content	ASTM D 445	%	31.8 to 33.2
6	Refractive Index at 20°C	ASTM D 1747	-	1.3814 to 1.3843
7	Alkalinity, max.	ASTM D 974	%	2

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

GAS ENGINE OILS



DIVYOL ECO4 SAE 20W40 API CF / SF High Performance Gas Engine Oil

Applications

Divyol ECO4 SAE 20W40 is a specially formulated lubricant designed for diesel engines in heavy duty applications. It is ideal for relatively older diesel engines, large or small, non-turbocharged or turbocharged diesel engines and recommended for use in heavy duty commercial vehicles, light commercial vehicles, multi-utility vehicles, tractors, three wheelers, gensets, etc. with high speed naturally aspirated or turbo charged diesel engines. It is especially good for driving in hilly regions.

Specifications

Divyol ECO4 SAE 20W40 meets and exceeds API CF / SF specifications. The oil is fortified with additives for high detergent, dispersant and anti-oxidation actions.

Pack Sizes

1 L, 5 L, 7.5 L, 10 L, 15 L, 26 L, 50 L, 210 L.

Advantages

Divyol ECO4 SAE 20W40 provides outstanding protection against wear, corrosion, oil degradation and thickening. It gives enhance protection especially to critical engine parts like cylinder liner, piston rings, valve, cams etc. It also ensures excellent oxidation stability over wide range of temperatures and extended oil drain intervals.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	110
6	Flash point, min. COC	ASTM D 92	°C	220
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	6
8	Pour point, max.	ASTM D 97	°C	-9

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL ECO4 20W50 API SG / SF

Premium Quality Gas Engine Oil

Applications

Divyol ECO4 20W50 is designed for CNG / LPG fitted cars, taxis, autorickshaws and other three-wheelers fitted with 4-stroke engines. It is blended from premium quality base stocks and selected additives that make the engines perform efficiently despite the high levels of methane and hydrogen sulphide.

Specifications

Divyol ECO4 20W50 meets and exceeds API SG / CF specifications.

Pack Sizes

1 L (HDPE and PET bottles), 3 L, 26 L, 50 L, 210 L.

Advantages

Divyol ECO4 20W50 provides excellent protection against corrosion caused by acid. It also maintains a clean engine by reducing deposits, ensures high oxidation stability and helps avoid unscheduled maintenance.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	16.3 – 21.9
5	Viscosity index, min.	ASTM D 2270	-	110
6	Flash point, min. COC	ASTM D 92	°C	220
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	6
8	Pour point, max.	ASTM D 97	°C	-9

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL GASOL 30 AND 40 API SG / CF

Premium Quality Gas Engine Oils

Applications

Divyol Gasol 30 and 40 are specially formulated for industrial applications with gas engines and gas compressors. They are suitable also for cars, trucks, vans and SUVs running on gas. These engine oils enable consistent performance from these machines and vehicles.

Specifications

Divyol Gasol 30 and 40 are blended using premium quality base stocks and additives and generate less than 0.5% ash content. They meet and exceed OEM specifications and are specially recommended for vehicles manufactured by Caterpillar, MWM, Perkins, Wartsila, Cummins, GEJENBACHER, MAN, WAUKESHA (APG), etc.

Pack Sizes

1 L (HDPE and Pet bottle), 3 L, 26 L, 50 L, 210 L.

Advantages

Divyol Gasol 30 and 40 provide excellent lubrication, piston cleanliness, superior control over deposit, high oxidation stability and protection against rust to engine internals. They also help extend the service life of the valve and spark plug.

Sr. No.	Characteristics	Test Method	UOM	Gasol 30	Gasol 40
1	Appearance	Visual	-	Bright and clear	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report	To report
4	Kinematic viscosity at 40 °C	ASTM D 445	cSt	To report	To report
5	Kinematic viscosity at 100 °C	ASTM D 445	cSt	9.3 – 12.5	12.5 – 16.3
6	Viscosity index, min.	ASTM D 2270	-	110	110
7	Flash point, min. COC	ASTM D 92	°C	220	220
8	TBN, min.	ASTM D 2896	mg KOH/g of oil	5	5
9	Pour point, max.	ASTM D 97	°C	-3	-3
10	Ash content	ASTM D 482	%	0.5	0.5

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

GEAR OILS



DIVYOL SPINE EP 90 API GL4

High Performance Gear Oil

Applications

Divyol Spine EP 90 is a high performance gear oil specially developed for cars, buses and off highway equipment. It is suitable for a wide range of gear units: with normal, bevel and helical gear designs, including synchromesh manual gearboxes. It also improves efficiency of transmissions and axles under moderately severe load and pressure conditions.

Specifications

Divyol Spine EP 90 meets and exceeds OEM standards for cars, vans and commercial vehicles, including API GL4, BIS 1118-92 RA 2011 (EP TYPE-GL4) and US MIL-L-2105.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spine EP 90 helps extend the service life of gears by providing excellent corrosion resistance leading to significant reduction in maintenance costs and noise level. It facilitates high load carrying capacity, even at high speeds.

Sr. No.	Characteristics	Test Method	UOM	Divyol Spine EP 90
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	5
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	14 – 18
5	Viscosity index, min.	ASTM D 2270	-	90
6	Flash point, min. COC	ASTM D 92	°C	195
7	Pour point, max.	ASTM D 97	°C	-6

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPINE EP 140 API GL4

High Performance Gear Oil

Applications

Divyol Spine EP 140 is a specially developed gear oil for both old and new generation vehicles including spiral, bevel, worm and syncromesh manual gears and transmission systems. It also improves efficiency of transmissions and axles under moderate to severe load and pressure conditions.

Specifications

Divyol Spine EP 140 meets and exceeds OEM performance standards as per API GL4, BIS 1118-92 RA 2011 (EP TYPE-GL4) and US MIL-L-2105.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spine EP 140 helps extend the service life of gears by providing excellent corrosion resistance thus significantly reducing maintenance costs and noise level. It also facilitates high load carrying capacity, especially at high speeds.

Sr. No.	Characteristics	Test Method	UOM	Divyol Spine EP 140
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	6
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	24 – 35
5	Viscosity index, min.	ASTM D 2270	-	90
6	Flash point, min. COC	ASTM D 92	°C	190
7	Pour point, max.	ASTM D 97	°C	-6

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPINE EP 80W90 API GL4 Multipurpose Gear Oil

Applications

Divyol Spine EP 80W90 Multipurpose Gear Oil is suitable for a wide range of gear units, especially in new generation vehicles including spiral, bevel or worm gear transmission systems. It is also suitable for Synchromesh manual gears, transmissions and axles working under moderate to severe load and pressure conditions.

Specifications

Divyol Spine EP 80W90 meets and exceeds performance levels and specifications of API GL4, BIS 1118-92 RA 2011 (EP TYPE-GL4) and US MIL-L-2105.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spine EP 80W90 provides excellent lubrication under severe service conditions. It helps extend the service life of gears by providing excellent corrosion resistance and shear stability, leading to significant reduction in maintenance costs and noise level. It facilitates high load carrying capacity, even at high speeds.

Sr. No.	Characteristics	Test Method	UOM	Divyol Spine EP 80W90
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	5
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	14 – 18
5	Viscosity index, min.	ASTM D 2270	-	90
6	Flash point, min. COC	ASTM D 92	°C	195
7	Pour point, max.	ASTM D 97	°C	-9

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPINE SXD XD 90, 75W90, 80W90 API GL5

Heavy Duty Premium Gear Oils

Applications

Divyol Spine GL5 is a series of heavy duty gear oils suitable for a wide range of commercial fleet, mechanical transmissions, gear boxes and axles, especially in very demanding operating conditions. This special blend is also recommended for hypoid and bevel gears in rear axles of vehicles and gear boxes.

Specifications

Divyol Spine GL5 gear oils meet and exceed OEM performance levels, including API GL5, IS:1118:1992 (EP Type GL-5) and US MIL-L-2105D.

Pack Sizes

500ml, 1 L, 5 L, 10 L, 20 L, 26 L, 50 L, 210 L

Advantages

Divyol Spine GL5 heavy duty gear oils provide excellent lubrication under severe operating conditions. They ensure the highest protection against wear and corrosion, enable easy gear shifting, especially at very low temperatures, and can withstand high bulk oil temperatures. These qualities help in extending service life of the engine and components.

Sr. No.	Characteristics	Test Method	UOM	Spine SXD 75W90 GL5	Spine XD 80W90 GL5	Spine_XD90
1	Appearance	Visual	-	Bright and clear	Bright and clear	Bright and clear
2	Colour, max.	ASTM D 1500	-	5	5	5
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report	To report	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	14 – 16	14 – 18	14 – 18
5	Viscosity index, min.	ASTM D 2270	-	100	90	90
6	Flash point, min. COC	ASTM D 92	°C	180	195	195
7	Pour point, max.	ASTM D 97	°C	-33	-9	-6

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPINE SXP 75W90 API GL4 – API GL4, SYNTH BLEND

Multi-purpose Extreme Pressure Gear Oil

Applications

Divyol Spine SXP 75W90 is ideal for gear boxes requiring extreme pressure properties such as hypoid and bevel gears. It is recommended for passenger cars, buses, highway trucks and worm gear axles, especially where API GL-4 gear oil is recommended. It is also suitable for manual transmission of automobiles and rear axles.

Specifications

Divyol Spine SXP 75W90 gear oil meets and exceeds OEM specifications such as API GL4, IS:1118:1992 (EP Type GL-4) and MIL-L-2105.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spine SXP 75W90 provides excellent lubrication under severe operating conditions. They ensure the highest protection against wear and corrosion, and also enable easy gear shifting, especially at very low temperatures. These qualities help in extending service life of the engine and components.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	5
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	14 – 16
5	Viscosity index, min.	ASTM D 2270	-	100
6	Flash point, min. COC	ASTM D 92	°C	180
7	Pour point, max.	ASTM D 97	°C	-33

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPINE XD 85W140 API GL5 Multipurpose Gear Oil

Applications

Divyol Spine XD 85W140 is a multipurpose gear oil suitable for a wide range of gear units particularly hypoid gears, axles operating under various combinations of high speed shock loads and low speed high torque conditions, especially where API GL-5 gear oil is recommended. It can be used for all types of on and off-highway vehicles working under severe and wide varied temperature conditions.

Specifications

Divyol Spine XD 85W140 meets and exceeds OEM performance standards of API GL5, BIS 1118-92 RA 2011 (EP TYPE-GL5) and US MIL-L-2105D.

Pack Sizes

500 ml, 1 L, 5 L, 10 L, 20 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spine XD 85W140 provides superior protection, minimizes wear, prevents pitting, limits slip properties for shaft drives and reduces heat transmission in the gear set. Consequently it extends gearbox life. These advantages make it ideal for extreme and high load conditions.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	6
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	24 – 35
5	Viscosity index, min.	ASTM D 2270	-	90
6	Flash point, min. COC	ASTM D 92	°C	190
7	Pour point, max.	ASTM D 97	°C	-6

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

HEAVY DUTY GAS ENGINE OILS



DIVYOL ENVO-X 1500 & 1400 API CF

Description & Application

Divyol ENVO-X series gas are premium heavy duty engine oils formulated with high viscosity index hydrogenated base oils and a new type of medium-ash additive system to provide reliable protection for Truck ,buses and heavy duty commercial vehicles using compressed Natural gas (CNG) or Liquefied Petroleum Gas (LPG) . These are specially designed to provide exceptional deposit, wear, oil oxidation and oil Nitration control with less varnish ,sludge and carbon build up under the most severe operating conditions.

Features & Benefits

- Improved cold temperature start up and pumping
- Low phosphorus content ensures exhaust system catalyst compatibility and maximizes
- Engine life
- Excellent shear stability reduces oil consumption and provides bearing wear and cylinder liner scuffing
- Excellent oxidation and nitration resistance protects against thickening and helps the oil stay in grade for longer

Performance Specifications

API – CF , Cummins – CES 20074, Detroit Diesel – DDC 93K216

Application

- Divyol ENVO X series engine oils are recommended for wide range of natural gas fueled engines of high compression ratio and turbo charged or naturally aspirated engines where oil meeting API CF and medium sulfated ash category are required.
- Also recommended for on highway light commercial vehicles as well as heavy duty trucks and buses.

Sr. No.	Characteristics	Test Method	X-1500 SAE 15W40	X-1400 SAE 20W50
1	Appearance	Visual	Bright & Clear	Bright & Clear
2	Colour	ASTM D 1500	Natural	Natural
3	Kinematic Viscosity at 100 °C, cSt	ASTM D 445	14.0 – 15.5	16.5 – 18.5
4	Pour Point °C, Max	ASTM D 97	-24	-24
5	Viscosity Index	ASTM D 2270	130	135
6	Flash Point °C (COC), Min	ASTM D 92	220	225
7	TBN mg , KOH/g	ASTM D 2896	5 – 5.5	5 – 5.5
8	Sulphated Ash, % wt	ASTM D 874	<0.60	<0.60

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

MOTOR CYCLE OILS



DIVYOL SPIN 4T ADVANCE 10W 30 API SL, JASO MA2

Premium High Performance Four Stroke Engine Oil

Applications

Divyol Spin 4T Advance 10W 30 is a premium engine oil specially formulated for technically advanced, high performance four-stroke motorcycle engines that are high speed, high power and air cooled. It is suitable for all the four stroke engines used by leading players like Hero Motocorp, Honda, TVS, Bajaj Auto, Suzuki, TVS, Yamaha, Kinetic, etc. It is also recommended for engines of two and three wheelers operating in severe conditions.

Specifications

Divyol Spin 4T Advance 10W 30 is developed using fine grade performance base oils and additives. It complies with requirements of engines equipped with a catalyst and is specially compatible with four stroke engines of Japanese origin. It meets and exceeds OEM specifications and performance levels API SL and JASO MA2.

Pack Sizes

900 mL, 1 L, 26 L, 50 L, 210 L

Advantages

Divyol Spin 4T Advance 10W 30 ensures clean combustion and maximum cleanliness of the engine. Its low pour point enables round the year use, including in extreme low weather conditions. It also enables maximum performance out of your bike throughout the year in a cost efficient way and provides complete protection to engine parts from wear and corrosion.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	9 - 11
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	5.5
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPIN 4T SCOOOL 10W 30 API SL, JASO MA2

Premium High Performance Four Stroke Engine Oil

Applications

Divyol Spin 4T Scoool 10W 30 is a premium engine oil specially formulated for new generation, four stroke, gearless motorcycles engines both, carburetor and fuel injected type. It is suitable for all the four stroke engines used by leading players like Honda, Hero Corp, Mahindra, etc., especially for engines of two and three wheelers operating in severe conditions.

Specifications

Divyol Spin 4T Scoool 10W 30 is developed using fine grade performance base oils and additives. The blend excels as a four stroke engine oil and is compatible with engines of Japanese origin. It meets and exceeds performance specifications of all leading manufacturers of four stroke engines as well as API SL and JASO MB.

Pack Sizes

800 mL, 26 L, 50 L, 210 L

Advantages

Divyol Spin 4T Scoool 10W 30 ensures clean combustion and maximum cleanliness of the engine. Its low pour point enables round the year use, including in extreme low weather conditions. It provides effective protection of the gearbox and engine parts from wear and corrosion and enables maximum high performance from your vehicle round the year in a most cost effective way.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	9.3 – 12.5
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	5.5
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPIN 4T 20W40 API SL, JASO MA2

Premium High Performance Four Stroke Engine Oil

Applications

Divyol Spin 4T 20W40 is a premium engine oil specially formulated for technically advanced, high performance four-stroke motorcycle engines that are high speed, high power and air cooled. It is suitable for all the four stroke engines used by leading players like Hero Motocorp, Honda, TVS, Bajaj Auto, Suzuki, TVS, Yamaha, Kinetic, etc. It is also recommended for engines of two and three wheelers operating in severe conditions.

Specifications

Divyol Spin 4T 20W40 is developed using fine grade performance base oils and additives. It complies with requirements of engines equipped with a catalyst and is specially compatible with four stroke engines of Japanese origin. It meets and exceeds OEM specifications and performance levels API SL and JASO MA2.

Pack Sizes

900 mL, 1 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spin 4T 20W40 ensures clean combustion and maximum cleanliness of the engine. Its low pour point enables round the year use, including in extreme low weather conditions. It also enables maximum performance out of your bike throughout the year and provides complete protection to engine parts from wear and corrosion.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	115
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	6
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



DIVYOL SPIN 4T ZOOM 20W 40 API SM, JASO MA2

Premium High Performance Four Stroke Engine Oil

Applications

Divyol Spin 4T Zoom 20W40 is a premium engine oil specially formulated for new generation, high performance four-stroke motorcycle engines. It is a non-friction modified, shear-stable, multigrade oil, suitable for four stroke engines of all the leading motorcycle brands like Hero Honda, Bajaj Auto, Honda, Hero MotoCorp, Suzuki, TVS, Yamaha, Mahindra, Kinetic, Enfield, etc.

Specifications

Divyol Spin 4T Zoom 20W40 is developed using fine grade performance base oils and additives. It is especially compatible with four stroke engines of Japanese origin. It meets and exceeds specifications of leading motorcycle manufacturers and performance levels API SM and JASO MA2.

Pack Sizes

900 mL, 1 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spin 4T Zoom 20W40 ensures clean combustion and maximum cleanliness of the engine. It also provides excellent oxidation and wear protection, resulting in extended relubrication intervals, plus longer engine and clutch life by preventing clutch slippage at start up and varying speed. It enables the user to get maximum high performance from their motorcycles throughout the year in a most cost-effective way.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	115
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPIN Q3 10W30 API SM / JASO MA2

High Performance Motorcycle Oil

Applications

Divyol Spin Q310W30 is specially formulated for modern four stroke engines in two-wheelers by leading manufacturers like Hero MotoCorp, Honda, TVS Suzuki, TVS, Kinetic, Mahindra, LML, etc. It is also suitable for engines of two and three-wheelers operating in severe conditions.

Specifications

Divyol Spin Q310W30 is developed using fine grade performance base oils and additives. It meets and exceeds specifications of all the leading motorcycle manufacturers and conforms to performance levels API SM, JASO MA2.

Pack Sizes

900 mL, 1 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spin Q310W30 ensures clean combustion and maximum cleanliness of the engine. Its low pour point enables round the year use, including in extreme low weather conditions and provides complete protection to engine and gear box from wear and corrosion while also reducing clutch slippage.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D-1500	-	Natural
3	Specific gravity @ 29.5 °C	ASTM D-1298	-	To report
4	Kinematic viscosity @ 100 °C	ASTM D-445	cSt	9.3 – 12.5
5	Viscosity index, min.	ASTM D-2270	-	125
6	Flash point, min. COC	ASTM D-92	°C	210
7	TBN, min.	ASTM D-2896	mgKOH/g of oil	5.5
8	Pour point, max.	ASTM D-97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



DIVYOL SPIN Q4 20W40 API SJ / JASO MA2

Multigrade Engine Oil

Applications

Divyol Spin Q420W40 is specially formulated for four stroke engines of two and three wheelers. It is suitable for all the four stroke engines used by leading manufacturers like Hero MotoCorp, Honda, TVS Suzuki, TVS, Kinetic, Mahindra, LML, etc. It is also suitable for engines of two and three-wheelers operating in severe conditions.

Specifications

Divyol Spin Q420W40 is developed using fine grade performance base oils and additives. It is compatible with four stroke engines of Japanese origin. It meets and exceeds specifications of all the leading manufacturers of stroke engines and conforms to performance levels API SJ and JASO MA2.

Pack Sizes

900 mL, 1 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spin Q420W40 ensures clean combustion and maximum cleanliness of the engine. Its low pour point enables round the year use, including in extreme low weather conditions and provides complete protection to engine parts from wear and corrosion. It is also a cost effective way to get maximum performance from the vehicle throughout the year.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	115
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	5.5
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



DIVYOL SPIN Q5 20W50

High Performance Multi-grade Motorcycle Oil

Applications

Divyol Spin Q520W50 is a high performance multigrade motorcycle oil specially formulated for modern four stroke engines. It helps you get the maximum performance from motorcycles even in difficult riding conditions. It is ideal for lubrication of engine, integrated gear box and wet clutch. It is recommended for all high powered modern and earlier models of four stroke engines with integral gear boxes and wet clutches. It is suitable for all the four stroke engines used by leading manufacturers like Hero Moto Corp, Honda, TVS Suzuki, TVS, Kinetic, Mahindra, LML, etc.

Specifications

Divyol Spin Q520W50 motorcycle oil is developed using fine grade performance hydro-processed group II base oils and additives. It is compatible with four stroke engines of Japanese origin. It meets and exceeds specifications of all the leading manufacturers of stroke engines. It also conforms to performance levels API SJ and JASO MA2.

Pack Sizes

900 mL, 1 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spin Q520W50 motorcycle oil ensures clean combustion and maximum cleanliness of the engine. It provides complete protection to engine parts from wear, corrosion and varnish. It also protects the gear during frequent gear changes. The oil helps prevent breakdowns even at high temperatures and reduces vibrations and noise. It also leads to reduced oil consumption and longer change over intervals. The benefits add up to a cost effective way to get maximum performance from your vehicle throughout the year.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	16.3 – 21.3
5	Viscosity index, min.	ASTM D 2270	-	110
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	5.5
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPIN4 MAX 20W50 API SG / JASO MA2

High Performance Multi-grade Motorcycle Oil

Applications

Divyol Spin4 MAX 20W50 API SG / JASO MA2 is a high performance multigrade motorcycle oil specially formulated for modern four stroke engines. It helps you get the maximum performance from motorcycles even in difficult riding conditions. It is ideal for lubrication of engine, integrated gear box and wet clutch. It is recommended for all high powered modern and earlier models of four stroke engines with integral gear boxes and wet clutches. It is suitable for all the four stroke engines used by leading manufacturers like Hero Moto Corp, Honda, TVS Suzuki, TVS, Kinetic, Mahindra, LML, etc.

Specifications

Divyol Spin4 MAX 20W50 API SG / JASO MA2 motorcycle oil is developed using fine grade performance hydro-processed group II base oils and additives. It is compatible with four stroke engines of Japanese origin. It meets and exceeds specifications of all the leading manufacturers of stroke engines. It also conforms to performance levels API SG and JASO MA2.

Pack Sizes

900 mL, 1 L, 1.15L, 26 L, 50 L, 210 L.

Advantages

Divyol Spin4 MAX 20W50 API SG / JASO MA2 motorcycle oil ensures clean combustion and maximum cleanliness of the engine. It provides complete protection to engine parts from wear, corrosion and varnish. It also protects the gear during frequent gear changes. The oil helps prevent breakdowns even at high temperatures and reduces vibrations and noise. It also leads to reduced oil consumption and longer change over intervals. The benefits add up to a cost effective way to get maximum performance from your vehicle throughout the year.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	16.3 – 21.3
5	Viscosity index, min.	ASTM D 2270	-	110
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	5.5
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



DIVYOL SPIN X2 20W50 API SJ / JASO MA2

High Performance Multi-grade Motorcycle Oil

Applications

Divyol Spin X2 20W50 is a high performance multi-grade motorcycle oil specially formulated for modern four stroke engines. It helps you get enhanced performance and maximum mileage from motorcycles. It is ideal for lubrication of engine, integrated gear box and wet clutch. It is recommended for all high powered modern and earlier models of four stroke engines with integral gear boxes and wet clutches. It is suitable for all the four stroke engines used by leading manufacturers like Hero Moto Corp, Honda, TVS Suzuki, TVS, Kinetic, Mahindra, LML, etc.

Specifications

Divyol Spin X2 20W50 motorcycle oil is developed using fine grade performance hydro-processed group II base oils and additives. It is compatible with four stroke engines of Japanese origin. It meets and exceeds specifications of all the leading manufacturers of stroke engines. It also conforms to performance levels API SJ and JASO MA2.

Pack Sizes

900 mL, 1 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spin X2 20W50 motorcycle oil ensures clean combustion and maximum cleanliness of the engine. It provides complete protection to engine parts from wear, corrosion and varnish. It also protects the gear during frequent gear changes. The oil helps prevent breakdowns even at high temperatures and reduces vibrations and noise. It also leads to reduced oil consumption and longer change over intervals. The benefits add up to a cost effective way to get maximum performance from your vehicle throughout the year.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	16.3 – 21.3
5	Viscosity index, min.	ASTM D 2270	-	140
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPIN X3 10W30 API SN / JASO MA2

Premium Semi Synthetic Engine Oil

Applications

Divyol Spin X3 10W30 is a premium semi-synthetic blend engine oil formulated for new generation four stroke engines of motorcycles and scooters; especially for sustainable high performance and protection of high power, high speed engines. It is ideal for high torque motorcycles as well as other two and three wheelers operating in severe conditions. It is suitable for all the four stroke engines used by leading automobile companies like Hero Honda, Bajaj Auto, Honda, Hero MotoCorp, Suzuki, TVS, Yamaha, etc.

Specifications

Divyol Spin X3 10W30 motorcycle oil is developed using fine grade performance base oils and additives. It complies with requirements of engines equipped with catalyst and is compatible with four stroke engines of Japanese origin. It meets and exceeds specifications of all the leading manufacturers of stroke engines. It also conforms to performance levels API SN and JASO MA2.

Pack Sizes

900 mL, 1 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spin X3 10W30 motorcycle oil ensures clean combustion for a clean engine. The formulation provides excellent resistance to thermal breakdown and thus reduces frequency of oil change. By giving excellent protection against wear and corrosion it also extends the service life of the engine. All these benefits add up into a smooth ride experience over a very long period.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	9.3 – 12.5
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	215
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPIN X4 20W40 API SN / JASO MA 2

Premium Semi Synthetic Engine Oil

Applications

Divyol Spin X4 20W40 is a semi-synthetic motorcycle oil that ensures sustained high performance from four stroke engines of motorcycles and scooters. The blend is specially formulated for the protection of modern high power and high speed engines. It is ideal for high torque motorcycles as also for two and three wheelers operating in severe conditions. It is suitable for all the four stroke engines used by the leading motorcycle makers like Hero Honda, Bajaj Auto, Honda, Hero Moto Corp, Suzuki, TVS, Yamaha, etc.

Specifications

Divyol Spin X4 20W40 motorcycle oil is developed using fine grade performance base oils and additives. It complies with the requirements of engines equipped with catalyst and is compatible with four stroke engines of Japanese origin. It meets and exceeds specifications of all the leading manufacturers of stroke engines and conforms to performance levels API SN and JASO MA2.

Pack Sizes

900 mL, 1 L, 26 L, 50 L, 210 L.

Advantages

Divyol Spin X4 20W40 motorcycle oil ensures clean combustion for a clean engine. The formulation provides excellent resistance to thermal breakdown and thus reduces frequency of oil change. By giving excellent protection against wear and corrosion it also extends the service life of the engine. All these benefits add up into a smooth ride experience over a very long period.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	130
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPIN X5 15W50 API SN / JASO MA2

Premium Semi Synthetic Engine Oil

Applications

Divyol Spin X5 15W50 is a semi synthetic oil specially formulated for new generation four stroke motorcycles and scooters. The blend is designed to ensure maximum protection of engine at very high speeds. It is ideal for heavy bikes that use high torque and heavy propulsion engine. It is especially recommended for two and three wheelers operating in severe conditions. It is suitable for all the four stroke engines used by the leading motorcycle makers like Honda, Bajaj Auto, Suzuki, Yamaha, Enfield, etc.

Specifications

Divyol Spin X5 15W50 motorcycle oil is developed using fine grade performance base oils and additives. It complies with the requirements of engines equipped with catalyst and is compatible with four stroke engines of Japanese origin. It meets and exceeds specifications of all the leading manufacturers of stroke engines and conforms to performance levels API SN and JASO MA2.

Pack Sizes

2.5 L, 26 L, 50 L, 210 L

Advantages

Divyol Spin X5 15W50 motorcycle oil ensures clean combustion for a clean engine. The formulation provides excellent protection against wear and corrosion extending the service life of the engine. It also keeps the engine cool on long rides.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	16.3 – 21.9
5	Viscosity index, min.	ASTM D 2270	-	140
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	7
8	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SWING SHOCKER OIL

All Weather Shocker Absorber Oil

Applications

Divyol Swing Shocker Oil is a powerful engine oil for motorcycles; also suitable as hydraulic fluid for front fork of motorcycles, spring struts, low-friction shock absorbers and other shock absorber mechanisms.

Specifications

Divyol Swing Shocker Oil is developed using fine grade performance base oils and additives. It meets and exceeds the specifications of leading shock absorber manufacturers.

Pack Sizes

175 mL, 350 mL, 50 L, 210 L.

Advantages

Divyol Swing Shocker Oil is suitable for high torque conditions. It provides excellent damping effect, chemical stability and seal compatibility. Its low pour point enables round the year use, even in extreme low weather conditions. It enhances the service life of shock absorbers. These benefits add up into maximum performance from your bike, in every way a smooth ride through the year in a cost effective manner.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	4
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 40 °C	ASTM D 445	cSt	70 – 75
5	Flash point, min. COC	ASTM D 92	°C	200
6	Pour point, max.	ASTM D 97	°C	<-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPIN4 20W40 API SG / JASO MA2

Multigrade Engine Oil

Specially formulated for the modern four stroke engines

Enhanced performance of motor cycles, scooters and auto rickshaws

- Developed using fine grade performance base oils and additives
- Ideal for four stroke engine of two and three wheeler vehicles
- Also, for the engines of two and three wheelers under severe conditions

Meets and exceeds the specs of all the leading manufacturers of the stroke engines

- Performance level : API SG, JASO MA2
- Compatible with four stroke engines of Japanese origin
- Suitable for all the four stroke engines used by the leading players like Hero MotoCorp, Honda, TVS Suzuki, TVS, Kinetic, Mahindra, LML etc.
- Pack sizes : 900ml, 1L, 26L, 50L, 210L

Get the most out of your two and three wheeler at an optimum cost, throughout the year

- Clean combustion and maximum cleanliness of the engine
- Low pour point enables round the year use, including in the extreme low weather conditions
- Complete protection to engine parts from wear and corrosion

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	115
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	5.5
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL SPIN EXCEL 20W50 API SL / JASO MA2

High Performance Multigrade Motorcycle Oil

Specially formulated for the modern four stroke engines

Enhanced performance of motor cycles for higher mileage

- Developed using fine grade performance hydro processed group II base oils and additives
- Ideal for the lubrication of engine, integrated gear box and wet clutch
- Recommended for all high powered modern and earlier models of four stroke engines with integral gear boxes and wet clutche

Meets and exceeds the specs of all the leading manufacturers of the stroke engines

- Performance level : API SL, JASO MA2
- Compatible with four stroke engines of Japanese origin
- Suitable for all the four stroke engines used by the leading players like Hero MotoCorp, Honda, TVS Suzuki, TVS, Kinetic, Mahindra, LML etc.
- Pack sizes : 900ml, 1L, 26L, 50L, 210L

Get the most out of your motorcycle at an optimum cost, throughout the year

- Clean combustion and maximum cleanliness of the engine
- Low pour point enables round the year use, including in the extreme low weather conditions
- Complete protection to engine parts from wear and corrosion

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	12.5 – 16.3
5	Viscosity index, min.	ASTM D 2270	-	115
6	Flash point, min. COC	ASTM D 92	°C	210
7	TBN, min.	ASTM D 2896	mg KOH/g of oil	5.5
8	Pour point, max.	ASTM D 97	°C	-21

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

OUTBOARD MOTOR OILS



DIVYOL GONDOLA X2 AND X3 API TC / JASO FC Outboard Motor Oils

Applications

Divyol Gondola X2 and X3 are lubrication oils for use in marine environments. The blend is specially formulated for two stroke outboard gasoline engines operating within strict tolerances. It is ideal for use in high speed, high load and high engine temperature conditions. It is suitable for use in both pre-mix and injection systems.

Specifications

Divyol Gondola X2 and X3 outboard motor oils is compatible with two stroke engine oils for engines of Japanese origin. It meets and exceeds specifications of leading outboard and personal watercraft manufacturers and also conforms to performance levels API TC and JASO FC.

Pack Sizes

500 ml, 1 L, 5 L, 20 L, 50 L, 210 L.

Advantages

Divyol Gondola X2 and X3 outboard motor oils have low ash detergent additives that provide protection against scuffing and wear. They provide effective protection to the engine in harsh marine environments and help extend the service life of the engine with clean burning, thus maximizing watercraft performance.

Sr. No.	Characteristics	Test Method	UOM	Specifications	
				Gondola X2	Gondola X3
1	Appearance	Visual	-	Bright and clear	Bright and clear
2	Colour, max.	ASTM D 1500	-	Greenish	Blue
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report	To report
4	Kinematic viscosity at 40 °C	ASTM D 445	cSt	60 – 75	48 – 52
5	Flash point, min. COC	ASTM D 92	°C	50	140
6	Pour point, max.	ASTM D 97	°C	-3	-3

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL GONDOLA X2 Outboard Motor Oils

Developed for two stroke outboard gasoline engine lubrication

Applications

Made for two stroke outboard engines operating within strict tolerances.

- Ideal for use in high speed, high load and high engine temperature conditions
- Suitable for use in both pre-mix and injection systems
- Suitable for marine environment

Specifications

Meets or exceeds recommendations of the leading outboard and personal watercraft manufacturers.

- Performance level : API TC, JASO FC
- Pack sizes : 5 L, 26 L, 50 L, 210 L
- Compatible with two stroke engines of Japanese origin

Advantages

Get the most out of your watercraft and enjoy the adventures out on the water for a long time.

- Inhibited with low ash detergent additives to provide protection against scuffing and wear
- Enhanced engine life with clean burning
- Highest level of engine protection in the harsh marine environment

Sr. No.	Characteristics	Test Method	UOM	Specifications
				Gondola X2
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Greenish
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 40 °C	ASTM D 445	cSt	60 – 75
5	Flash point, min. (COC)	ASTM D 92	°C	50
6	Pour point, max.	ASTM D 97	°C	-3

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL GONDOLA X3

Outboard Motor Oils

Applications

Divyol Gondola X3 is specially formulated lubrication oil for two stroke outboard gasoline engines operating within strict tolerances. It is ideal for use in for use in both pre-mix and injection systems, in high speed, high load and high engine temperature conditions in marine environments.

Specifications

Divyol Gondola X3 outboard motor oil is compatible with two stroke engine oils for engines of Japanese origin. It meets and exceeds specifications of leading outboard and personal watercraft manufacturers and also conforms to performance levels API TC and JASO FC.

Pack Sizes

5 L, 26 L, 50 L, 210 L.

Advantages

Divyol Gondola X3 outboard motor oil has low ash detergent additives that provide protection against scuffing and wear. It provides effective protection to the engine in harsh marine environments and helps extend the service life of the engine with clean burning, thus maximizing watercraft performance.

Sr. No.	Characteristics	Test Method	UOM	Specifications
				Gondola X3
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Blue
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 40 °C	ASTM D 445	cSt	48 – 52
5	Flash point, min. COC	ASTM D 92	°C	140
6	Pour point, max.	ASTM D 97	°C	-3

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

TRANSMISSION FLUIDS



DIVYOL HY TRANS G SAE 10W AND 30

Power Shift Transmission Fluids

Applications

Divyol HY Trans G SAE 10W and 30 are heavy duty automatic transmission oils specially developed for a significantly improved performance over TO-2 oils. They are recommended especially for the new Caterpillar TO-4 power shift transmission, friction devices, clutches, brakes, train equipment like final drives, differentials and bevel gears. They are suitable also for older Caterpillar equipment and off-highway equipment with power shift transmission for hydraulically applied internal clutches.

Specifications

Divyol HY Trans G SAE 10W and 30 transmission oils are formulated with superior quality hydro finished base oils and additives. The blend meets and exceeds OEM specifications and conforms to performance levels of Caterpillar TO-4, Allison C-4 and ZF TE ML 03/01.

Pack Sizes

500 ml, 1 L, 5 L, 26 L, 50 L, 210 L.

Advantages

Divyol HY Trans G SAE 10W and 30 transmission oils have the required friction characteristics for a smooth transmission performance. The blend ensures excellent oxidation stability and enhanced transmission life, besides excellent protection to critical and complex transmission components from rust and corrosion.

Sr. No.	Characteristics	Test Method	UOM	Specifications	
				HY Trans G SAE 10W	HY Trans G SAE 30
1	Appearance	Visual	-	Bright and clear	Bright and clear
2	Colour, max.	ASTM D 1500	-	3	3
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report	To report
4	Kinematic viscosity at 40 °C	ASTM D 445	cSt	40 – 50	100 – 110
5	Kinematic viscosity at 100 °C	ASTM D 445	cSt	6.8 – 7.5	11.5 – 12.5
6	Viscosity index, min.	ASTM D 2270	-	110	100
7	Flash point, min. COC	ASTM D 92	°C	210	230
8	Pour point, max.	ASTM D 97	°C	-30	-18

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL POWER TRANS C3 / C4 SAE 10 AND 30

Hydraulic Transmission Fluids

Applications

Divyol Power Trans C3 / C4 SAE 10 and 30 are heavy duty automatic transmission oils, specially developed for on and off-highway requirements including earth-moving machinery. These oils are ideal for heavy duty and power shift transmissions.

Specifications

Divyol Power Trans C3 / C4 SAE 10 and 30 transmission oils are formulated with superior quality hydro finished base oils and additives. They meet and exceed leading OEM specifications including Type C-4 of Allison Transmission Division of General Motors, USA, and Caterpillar TO-2.

Pack Sizes

500 ml, 1 L, 5 L, 26 L, 50 L, 210 L.

Advantages

Divyol Power Trans C3 / C4 SAE 10 and 30 p transmission oils have the required friction characteristics for a smooth transmission performance. These oils ensure excellent oxidation stability and retain fluidity even at low temperatures. They provide effective protection against corrosion and wear, especially to critical and complex transmission components.

Sr. No.	Characteristics	Test Method	UOM	Specifications	
				Power Trans C3 / C4 SAE 10	Power Trans C3 / C4 SAE 30
1	Appearance	Visual	-	Bright and clear	Bright and clear
2	Colour, max.	ASTM D 1500	-	Natural	Natural
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	5.6 – 7.4	9.3 – 12.5
5	Viscosity index, min.	ASTM D 2270	-	95	95
6	Flash point, min. COC	ASTM D 92	°C	190	200
7	Pour point, max.	ASTM D 97	°C	-21	-15

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL HYDRAULIC OIL 30W Construction Equipment Oil

Specially designed for equipment deployed in the construction and mining sector

Applications

Smooth operation of wide range of heavy duty and static hydraulic applications.

- Ideal for heavy duty applications like bulldozers, excavators, diggers and cranes
- Formulated using high viscosity-index paraffinic base stocks and premium performance additives

Specifications

Meets and exceeds OEM specs.

- Meets the anti-wear specifications of the leading equipment manufacturers
- Performance level : Caterpillar TO-2
- Pack sizes : 26 L, 50 L, 210 L

Advantages

Get the most from your machinery and extend its performance.

- Superior protection to the equipment against wear, corrosion and foaming
- Helps maintain a clean engine
- Better fuel efficiency at an optimum cost
- Effective lubrication viscosity at elevated temperatures

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	2.5
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	10 – 12.5
	Viscosity index, min.	ASTM D 2270	-	110
5	Flash point, min. (COC)	ASTM D 92	°C	210
6	Pour point, max.	ASTM D 97	°C	-15

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL TQX II – TYPE: DEXRON II G

Hydraulic Transmission Fluid

Applications

Divyol TQX DEXRON II G is a superior quality transmission and power steering oil specially formulated for modern automatic transmission cars. It is ideal for automatic transmission systems, power steering and hydraulic fluid applications in passenger cars and commercial vehicles.

Specifications

Divyol TQX DEXRON II G automatic transmission fluid is developed using select hydro finished base oils and additives. It meets and exceeds leading OEM specifications and conforms to performance level of vehicles requiring Dexron II fluid.

Pack Sizes

500 ml, 1 L, 5 L, 26 L, 50 L, 210 L.

Advantages

Divyol TQX DEXRON II G automatic transmission fluid has the required friction characteristics for a smooth transmission performance. It retains good fluidity even at low temperatures. It also has excellent anti-oxidation, dispersancy, anti-wear and de-foaming properties. These qualities extend the service life of seal components and ensure complete and effective protection, especially to the critical and complex transmission components.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	7 – 8.5
5	Viscosity index, min.	ASTM D 2270	-	160
6	Flash point, min. COC	ASTM D 92	°C	180
7	Pour point, max.	ASTM D 97	°C	-39

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL TQX TYPE: DEXRON III E

Hydraulic Transmission Fluid

Applications

Divyol TQX DEXRON III E is a superior quality transmission and power steering oil developed for modern automatic transmission cars, especially passenger cars and commercial vehicles. It is ideal for automatic transmission systems, power steering, hydraulic systems and torque converters.

Specifications

Divyol TQX DEXRON III E automatic transmission fluid is formulated using superior quality hydro finished base oils and additives. It meets and exceeds leading OEM specifications and conforms to performance level of vehicles requiring Dexron III fluid.

Pack Sizes

500 ml, 1 L, 5 L, 26 L, 50 L, 210 L.

Advantages

Divyol TQX DEXRON III E automatic transmission fluid has the required friction characteristics for a smooth transmission performance. It retains good fluidity even at low temperatures. It also has excellent anti-oxidation, dispersancy, anti-wear and de-foaming properties. These qualities help extend the service life of seal components and ensure complete and effective protection, especially to the critical and complex transmission components.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	6.8 – 8.4
5	Viscosity index, min.	ASTM D 2270	-	160
6	Flash point, min. COC	ASTM D 92	°C	180
7	Pour point, max.	ASTM D 97	°C	-39

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL TQX-1

Hydraulic Transmission Fluid

Applications

Divyol TQX-1 automatic transmission fluid is specially developed for light vehicles that have modern automatic transmission and power steering units.

Specifications

Divyol TQX-1 automatic transmission fluid is blended from premium quality base stocks and advanced additives. It meets performance specifications of General Motor's automatic transmission fluid Type 'A' Suffix 'A', as well other OEM specifications.

Pack Sizes

500 ml, 1 L, 5 L, 26 L, 50 L, 210 L.

Advantages

Divyol TQX-1 automatic transmission fluid has the required friction characteristics for a smooth transmission performance. It also has excellent anti-oxidation, dispersancy, anti-wear and de-foaming properties. These qualities ensure complete and effective protection, especially to the critical and complex transmission components.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	-	Bright and clear
2	Colour, max.	ASTM D 1500	-	Red
3	Specific gravity at 29.5 °C	ASTM D 1298	-	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	7 – 8.5
5	Viscosity index, min.	ASTM D 2270	-	150
6	Flash point, min. COC	ASTM D 92	°C	180
7	Pour point, max.	ASTM D 97	°C	-39

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.

DIVYOL ENTRO HVI 10W Construction Equipment Oil

Applications

Divyol Entro HVI 10W is designed for use in the construction and mining sector. Its specially formulated blend ensures smooth operation of heavy duty and static hydraulic machines and equipment like bulldozers, excavators, diggers, cranes, forklifts, power press, etc.

Specifications

Divyol Entro HVI 10W construction equipment oil is formulated from high viscosity index solvent refined mineral base oils and superior additives. It meets the most stringent and anti-wear specifications of leading equipment manufacturers.

Pack Sizes

1.5 L, 3.5 L, 26 L, 50 L, 210 L.

Advantages

Divyol Entro HVI 10W offers superior protection to the equipment against wear, corrosion and foaming. It's acknowledged as the most economical way to increase fuel efficiency and maintain a clean engine. It is well-known also for effective lubrication viscosity at elevated temperatures.

Sr. No.	Characteristics	Test Method	UOM	Specifications
1	Appearance	Visual	–	Bright and clear
2	Colour, max.	ASTM D 1500	–	1
3	Specific gravity at 29.5 °C	ASTM D 1298	–	To report
4	Kinematic viscosity at 100 °C	ASTM D 445	cSt	5
5	Viscosity index, min.	ASTM D 2270	–	130
6	Flash point, min. COC	ASTM D 92	°C	190
7	Pour point, max.	ASTM D 97	°C	-24

Disclaimer: Gandhar makes no warranties, representation or conditions of any kind expressed or implied for use with respect to these products. Final determination of suitability of the product for the application contemplated by the users is solely their responsibility.

Storage: All packages should be stored under cover. Avoid direct sun light or heat. Keep the container in closed / properly sealed condition to avoid contamination.

Handling, Health & safety: As with all the products, please take care to avoid environmental contamination when disposing of this product. Do not dispose the used oil to soil, drains and water. Avoid contact with skin and eyes. After skin contact wash with soap and water. This product should not cause any health problems when used in the applications suggested and the guidance provided in the safety data sheet (SDS) is followed.



Gandhar Oil Refinery (India) Limited

ISO 9001:2015, ISO 14001:2015, ISO 45001:2018, GMP Certified, NABL Accreditation and Government Recognized Three Start Export House

Registered Office

18th Floor, DLH Park, S. V. Road, Goregaon (W), Mumbai 400062, India. | Phone: +91-22-40635600 | Fax: +91-22-40635601
Email: sales@gandharoil.com | Website: www.gandharoil.com

Branch Offices and Depots

Pune | Baroda | Indore | Raipur | Udaipur | Jaipur | Delhi | Faridabad | Ghaziabad | Sonapat | Manesar | Haridwar | Patna | Hyderabad | Mangalore | Bangalore
Guwahati | Varanasi | Hapur | Dharamtar | Jaigarh | Kandla | Surat (Magdalla) | Navlakhi | Krishnapatnam | Vishakapatnam | Gangavaram

Plants

Taloja | Silvassa | Sharjah